
WINWING SIM


PFP-3N

User Manual

V1.0 2024.11

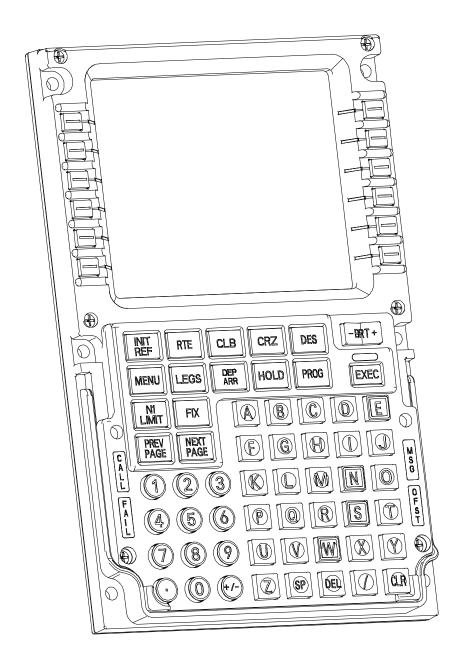

Packing List

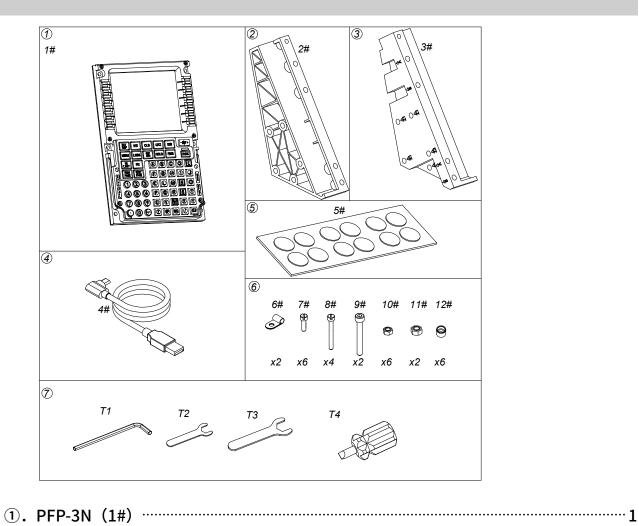

②. Mounting Bracket-Left(2#)1		
③. Mounting Bracket-Right(3#)······1		
④. Data Cable (4#) ····································		
⑤. Nano Double Sided Adhesive Dots(5#) ·······1		
6. Accessory Bag(6#~12#)		
6#: R Shape Cable Clip UC-0.5	7#:M4*18 Slotted Cylinder Screw	
	M4*18	
8#:Slotted Cylinder Screw M4*30	9#:Socket Head Screw M5*40	
10#:Hexagon Nut M4 304	11#:Hexagon Nut M5 304	
12#: PFP-3N-Screw Ring 1		


①. Tool Bag (T1~T4) ------1

Catalog

1. Product Profile
1.1 Parts Diagram
1.2 Performance Specifications
1.3 Product Dimensions
1.4 Installation Dimensions
1.5 Installation Compatibility
2 First Use
2.1 Software Installation
2.2 Parts Installation
2.3 How to Use
3 Functions
3.1 Mechanical and Special Features
3.2 Buttons
3.3 Data Interface
3.4 Adjustment Method
4 Installation Methods
4.1 esktop Mounting Method
4.2 Profile Installation (*Profile rails and related accessories are required and not included.)
4.3 Panel Mounting Bracket (MP1) Installation (*MP1 is sold separately.)
4.4 Integrated Device Installation
5 Maintenance and Care
5.1 Firmware Upgrade
5.2 Cleaning and Maintenance
5.3 FAQs and After-Sales Service 24
6 Safety Precautions

1. Product Profile

1.1 Parts Diagram

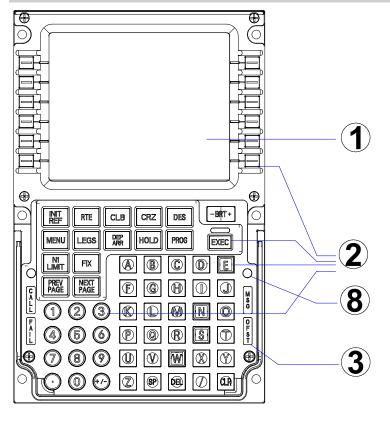


- (1) Display
- 2 Push Button
- 3 Indicator Light
- 4 Mounting Holes for Included

Brackets

- 5 LLED Indicator
- 6 POWER ONLY Port (5V Voltage)
- (7) USB Data Port
- **8** Light Sensor


1.2 Performance Specifications

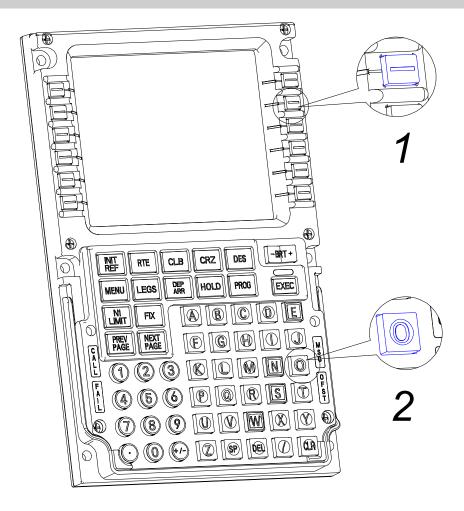


Press Travel: 1.0mm for Line Select Keys.


Press Travel: 1.3mm for Keys on the Keypad.

1.3 Product Dimensions

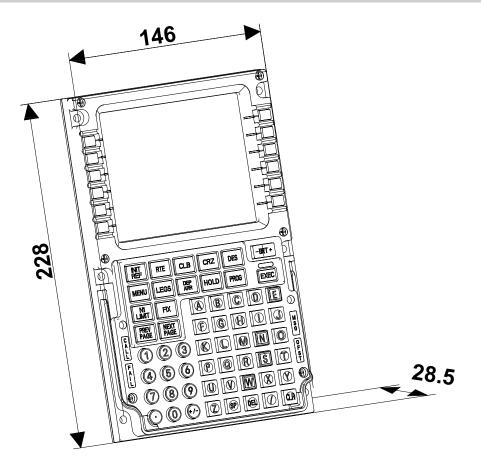


- L x W x H:228mm*146mm*28.5mm; weight: 0.47Kg=1.04lb.
- Bracket Dimensions (L x W x H: 158.9mm*57.4mm*32.5mm)

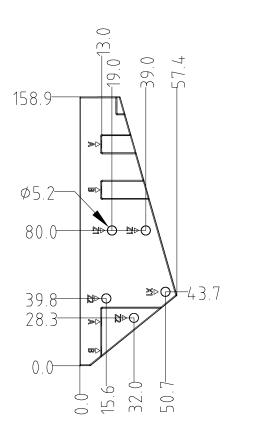

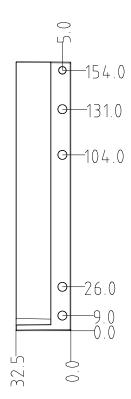

1.4 Installation Dimensions

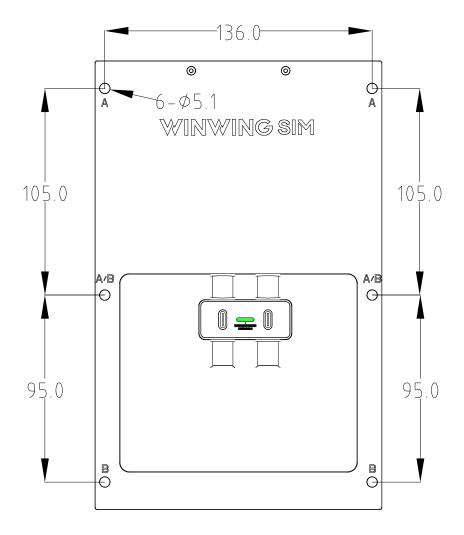

1.5 Installation Compatibility

- Can be used independently.
- Can be mounted in combination with various control panels using brackets (see upcoming products for details).

PFP-3N 用户手册 9 / 28

2 First Use

2.1 Software Installation

Download SimAppPro

Download URL:

Mainland China Download Link

https://cn.winwingsim.com/view/simapppro.html

Overseas Download Link

https://winwingsim.com/view/simapppro.html

Install SimAppPro

Please follow the instructions to install the software, then run the program.

The product can be customized within SimAppPro. (For more details, refer to the SimAppPro User Manual.)

When using the product, please run SimAppPro first before entering the game (the
product will automatically adapt to supported games and aircraft modules,
plug-and-play. For more details, refer to the SimAppPro User Manual).

SimAppPro User Manual Download Link:

Chinese User Manual

https://cn.winwingsim.com/view/regular.html#manual-130

English User Manual

https://winwingsim.com/view/regular.html#manual-132

PFP-3N 用户手册 10 / 28

2.2 Parts Installation

- Install the bracket in a suitable position according to your needs (see Section 4
 Installation Methods for details).
- Alternatively, it can be installed on the profile for use (see Section 4 Installation Methods for details).

2.3 How to Use

Device Connection

The product connects to the computer via the included data cable. For details on the interfaces, refer to Section 3.3 Data Interface.

How to Connect

- (1)Insert the included data cable (4#) into the product's USB data interface (③) and connect it to your computer.
- (2)For products requiring assembly, only the USB interface supports hot-swapping. For other interfaces, ensure that the product is properly connected before connecting to the computer.

(Important: If you need to connect other interfaces such as PS2, SATA, or aviation connectors, make sure to disconnect the USB cable before proceeding.)


(3)After connecting the product to the computer, secure the cable with R Shape Cable Clip to the bracket (see Section 4 Installation Methods for details), so as to prevent damage to the product's interface.


3 Functions

3.1 Mechanical and Special Features

(空) /

3.2 Buttons

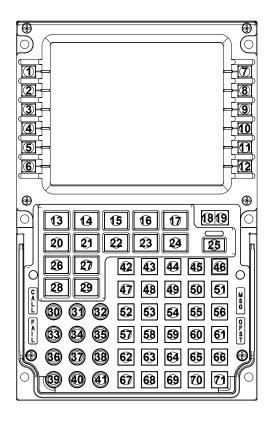

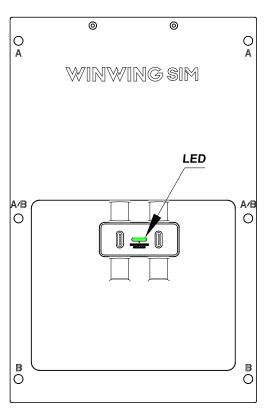

LED Status Display:

- Green steady slow flash (1s interval) BOOT Mode
- Green slow flash (1s interval) for 5 times, then steady on $\,-\,$ Operation Mode
- Green slow flash (1s interval) for 5 times, then off $\,-\,$ Power-Only Mode

3.3 Data Interface

• 7USB Data Port

Used for communication and power supply between the product and the computer. Simply connect this cable to use the product.

Communication Protocol: HID

⑥POWER ONLY Port (5V Voltage)

When only the ① USB Data Port is connected, some computers may experience insufficient power supply, which could result in low screen brightness, failure to display properly, or the device not being recognized. Using this TYPE-C interface to connect an additional 5V power supply can provide independent power to the device.


3.4 Adjustment Method

/

4 Installation Methods


4.1 esktop Mounting Method

 Bracket Mounting Position: Install the bracket at a 16-degree angle relative to the desktop.

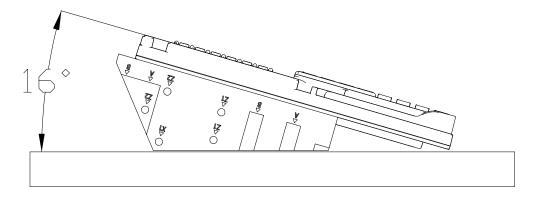


Left and Right Brackets Mounting Method

A Holes Mounting (Mount the corresponding screws as shown in the diagram)

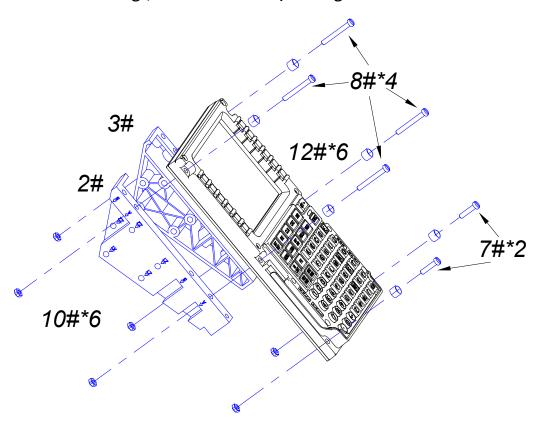


*Screw in the screws, but do not tighten them yet.

- Mount the R Shape Cable Clip as shown in the diagram.

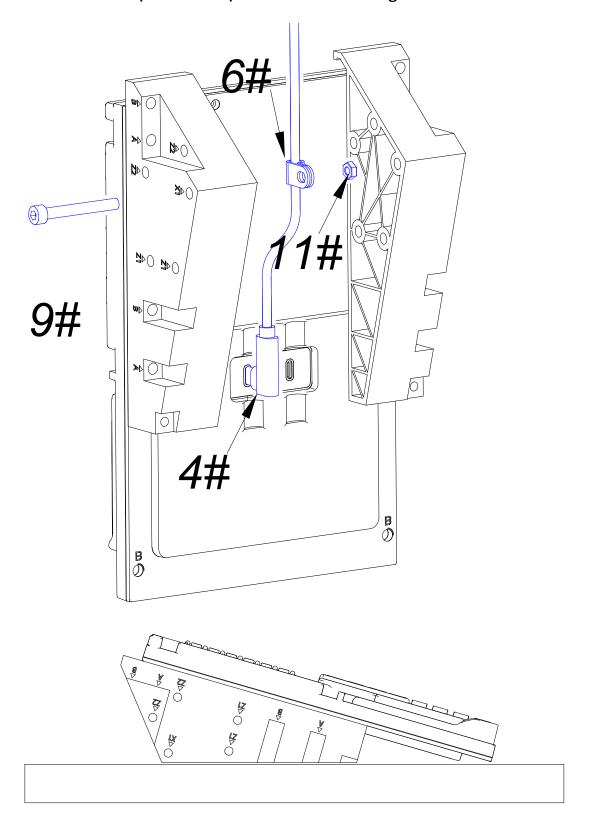

- Adjust the bracket position up and down until it is stable on the desktop, then tighten the screws.
- Tighten the screws until there is no wobbling; over-tightening may cause damage.

- Apply the Nano Double Sided Adhesive Dots (5#).

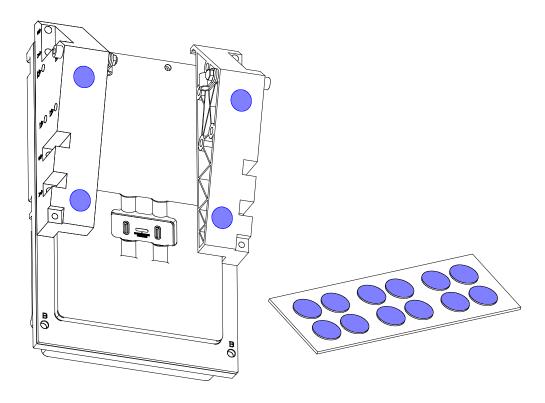

* Clean the dust off the bracket surface before mounting.

Press firmly for at least 10 seconds during application and let it sit for 30 minutes to ensure the best adhesive effect.


For single-use application only on clean, smooth surfaces. Do not apply to surfaces with wax, oil, water stains, dust, dirt, or rough textures to avoid improper adhesion and potential detachment.

The ideal temperature for application is between -10°C and 40°C.


4.2 Profile Installation (*Profile rails and related accessories are required and not

included.)

4080 Profile Installation Diagram

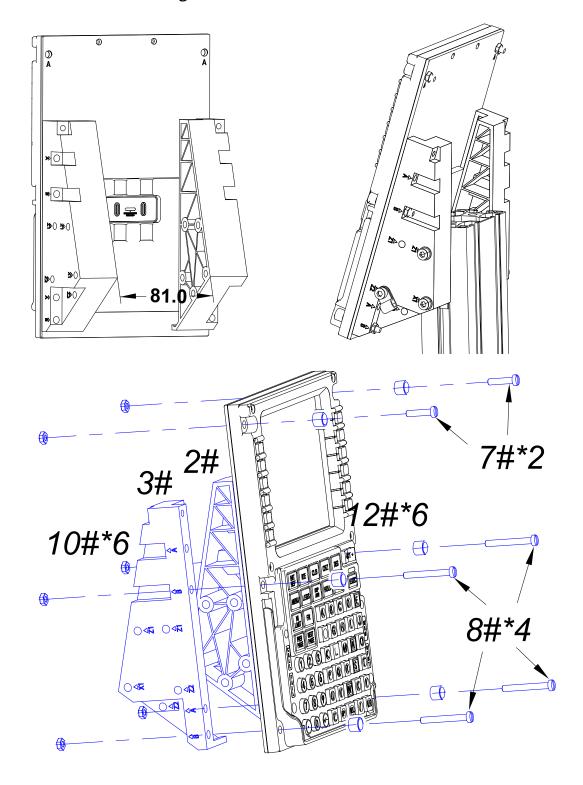

^{*} Screw in the screws here, but do not tighten them yet.

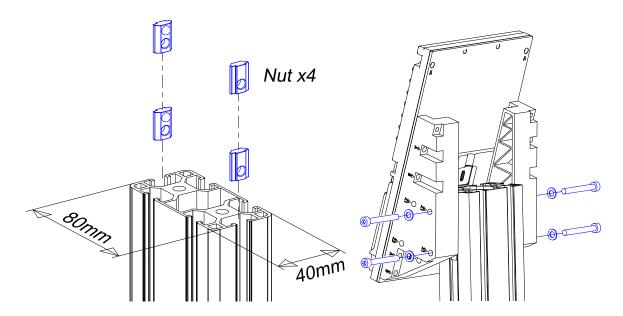


- Tighten the screws here until there is no wobbling; over-tightening may cause damage.
- Recommended Specifications for Self-Prepared Accessories

Itam	Chacifications	Quantity
Item	Specifications	(Minimum)
Profile	EU Standard 4080	1
Profile Nut	40 Series - M5	4
Socket Cap Screw	M5*40	4
Flat Washer	ф5	4

4.3 Panel Mounting Bracket (MP1) Installation (*MP1 is sold

separately.)


Panel Mounting Bracket (MP1) List (Sold separately, refer to the MP1 User Manual for detailed specifications.)

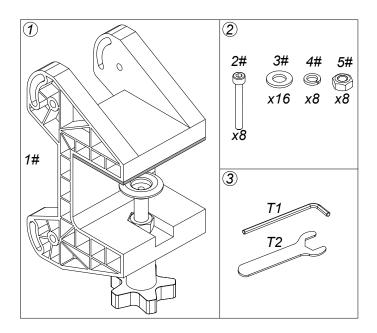


In this section, the materials shown in the figure will be described respectively as "MP1+NUMBER" (such as MP11#, MP12#, MP13#).


Mounting Method:


A Holes Mounting

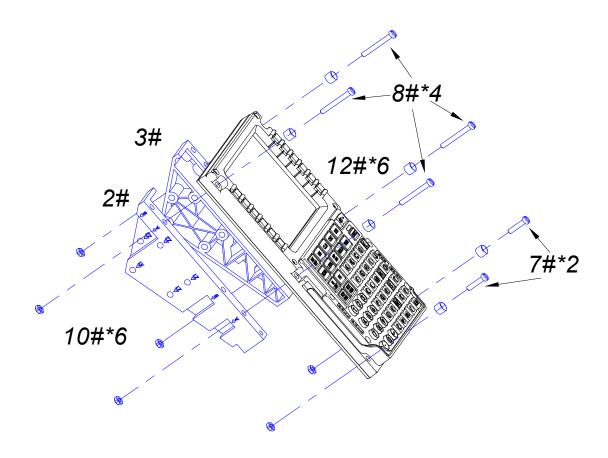


*Screw in the screws, but do not tighten them yet.

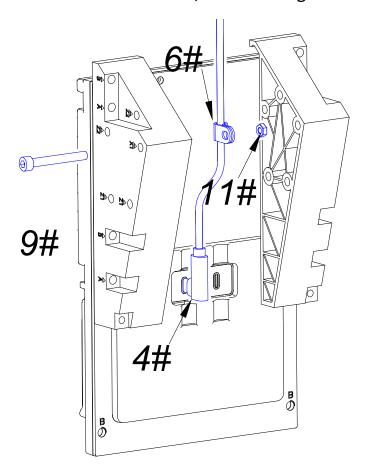


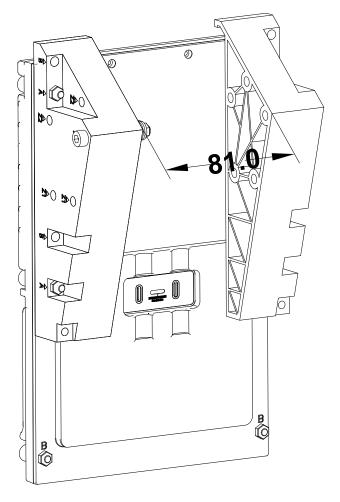

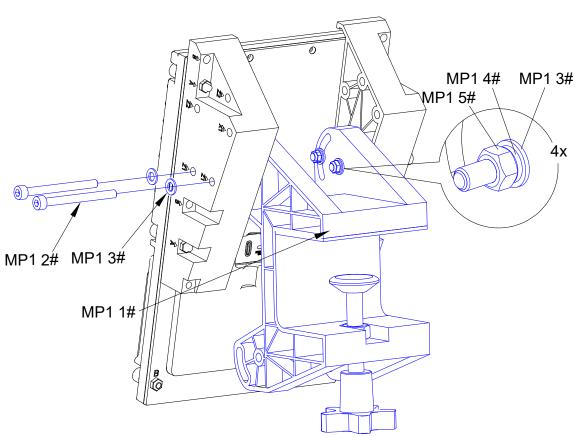

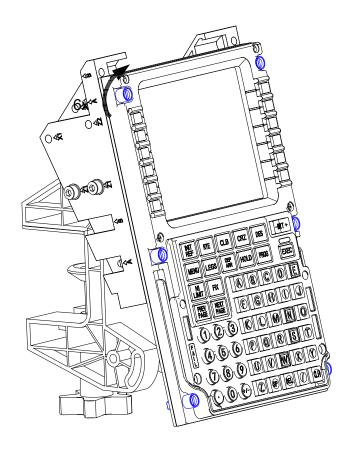

- Tighten the screws until there is no wobbling; over-tightening may cause damage.

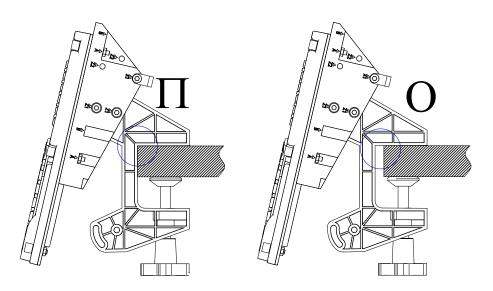

*Clean the dust off the bracket surface before mounting.

- Adjust the bracket position up and down until it is stable on the desktop, then tighten the screws.
- Tighten the screws until there is no wobbling; over-tightening may cause damage.

4.4 Integrated Device Installation

Game Seat Mounting

PFP-3N 用户手册 23 / 28

5 Maintenance and Care

5.1 Firmware Upgrade

- Before upgrading, ensure the product's wiring is securely connected and follow the instructions on the SimAppPro interface.
- If you encounter issues during the upgrade, try restarting SimAppPro and reconnecting the device's USB Data Port. * NOTE: Other interfaces, such as PS2, SATA, or aviation connectors, do not support hot-swapping. If you need to connect these interfaces, please disconnect the USB cable first.
- If the upgrade still cannot be completed, please contact Customer Service on WINWING website for technical support.

5.2 Cleaning and Maintenance

- To prevent sand, dust, and dirt from accidentally entering the product, this product features a dust-resistant design. However, it cannot completely prevent dirt, dust, water, or salt from entering the internal components. Avoid allowing dirt, dust, water, or salt to fall onto the product, and keep it clean.
- It is recommended to clean the product after use. Allowing dirt, dust, water, or salt to remain on the product may cause malfunction.
- Do not place the product near objects with strong magnetic fields, such as magnets or electric motors. Strong magnetic fields may cause abnormal data in the product.
- Do not place the product in high-temperature areas, such as inside a car exposed to

PFP-3N 用户手册 24 / 28

direct sunlight. High temperatures may cause product malfunction.

- The product contains precision electronic circuits. Do not disassemble the product.
- Do not touch the product's electronic contacts with your fingers to avoid corrosion.
 Corroded contacts may lead to product malfunction.
- If the product suddenly moves from a low-temperature environment to a warm room, condensation may form on the surface and internal components. To prevent condensation, place the product in a sealed plastic bag and wait for the temperature to gradually rise before removing it from the bag.
- If condensation occurs on the product, do not use it to avoid damage. Wait for all
 moisture to evaporate before continuing to use the product. Even after the product is
 fully dried, the internal components may still be at a low temperature.
- Avoid storing the product in chemical laboratories or areas with chemicals that may cause rust or corrosion.
- Use only original accessories for maintenance and replacement.

5.3 FAQs and After-Sales Service

Frequently Asked Questions:

- If the product is experiencing abnormalities, please check if the firmware and SimAppPro version are up to date and perform an upgrade if necessary.
- If you experience signal instability or drift during use, try recalibrating within SimAppPro or clearing the game controller data in Windows.
- If the product is having issues with unstable connection or is not recognized by the

PFP-3N 用户手册 25 / 28

computer, try switching to a different USB port (it is recommended to use a USB port directly on the motherboard or a three-prong USB hub with independent power and proper grounding). Also, try cleaning the data cable's connectors with alcohol or replacing the cable to see if the signal stabilizes.

- * NOTE: If you need to connect other interfaces, such as PS2, SATA, or aviation connectors, please disconnect the USB cable first before proceeding.
- After connecting the product to the computer, make sure to secure the cables in the fixed clips to prevent damage to the product's connectors.
- When assembling and connecting the product and accessories, ensure that the screws are tightened correctly and that no components are loose or over-tightened. Incorrect handling may cause unusual sounds during operation.
- When using a USB hub to connect the product, ensure that the three-prong hub has independent power supply and proper grounding. Otherwise, the product's signal may be unstable.

PFP-3N 用户手册 26 / 28

6 Safety Precautions

For safe use of the product, please be sure to read these precautions.

Please follow these precautions to prevent harm or injury to the user or others.

- Keep the product out of the reach of children.
- Swallowing product parts or accessories is extremely dangerous. If swallowed accidentally, seek medical attention immediately.
- Use only the power supply specified in the product user manual that is intended for use with this product.
- Do not disassemble or modify the product.
- Do not subject the product to strong impacts or vibrations.
- Do not touch any exposed internal components.
- If the product emits smoke, an unusual odor, or exhibits any abnormal behavior, stop using it immediately.
- Do not clean the product surface with organic solvents such as alcohol, gasoline, or paint thinner.
- Do not get the product wet, and do not insert foreign objects or pour liquids into the product.
- Do not use the product in environments where flammable gases may be present, as static electricity may cause explosions or fires.
- During thunderstorms, do not touch the product connected to a power outlet, as this may result in electric shock

Disclaimer

Please read and understand the contents of the product user manual carefully. Failure to follow the instructions may result in personal injury or damage to the product.

Ensure that all personnel using this product are familiar with and understand the user

PFP-3N 用户手册 27 / 28

manual to maximize the product's value.

Any personal injury, property damage, or product damage resulting from improper use or

failure to follow the user manual will be the sole responsibility of the user. The company

will not be held liable for such incidents.

When users are using the product:

Users should install, handle, store, use, maintain, and dispose of the product according to

the product guidelines, relevant laws, regulations, and safety standards, without violating

any applicable laws.

Since the conditions and methods in which the user uses this product are beyond the

control of the company, the company is not liable for any consequences arising from the

following situations. The responsibility lies solely with the user:

- Personal injury, property damage, or product damage caused by improper user operation,

failure to follow the product user manual, or other uncertain factors.

- Changes in the product's technical specifications, data, or content of the user manual due

to improvements in reliability, functionality, design, or other reasons, without prior notice.

NO: 20241120-01DY-P

WINWING SIM

WINWINGSIM.COM